


The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

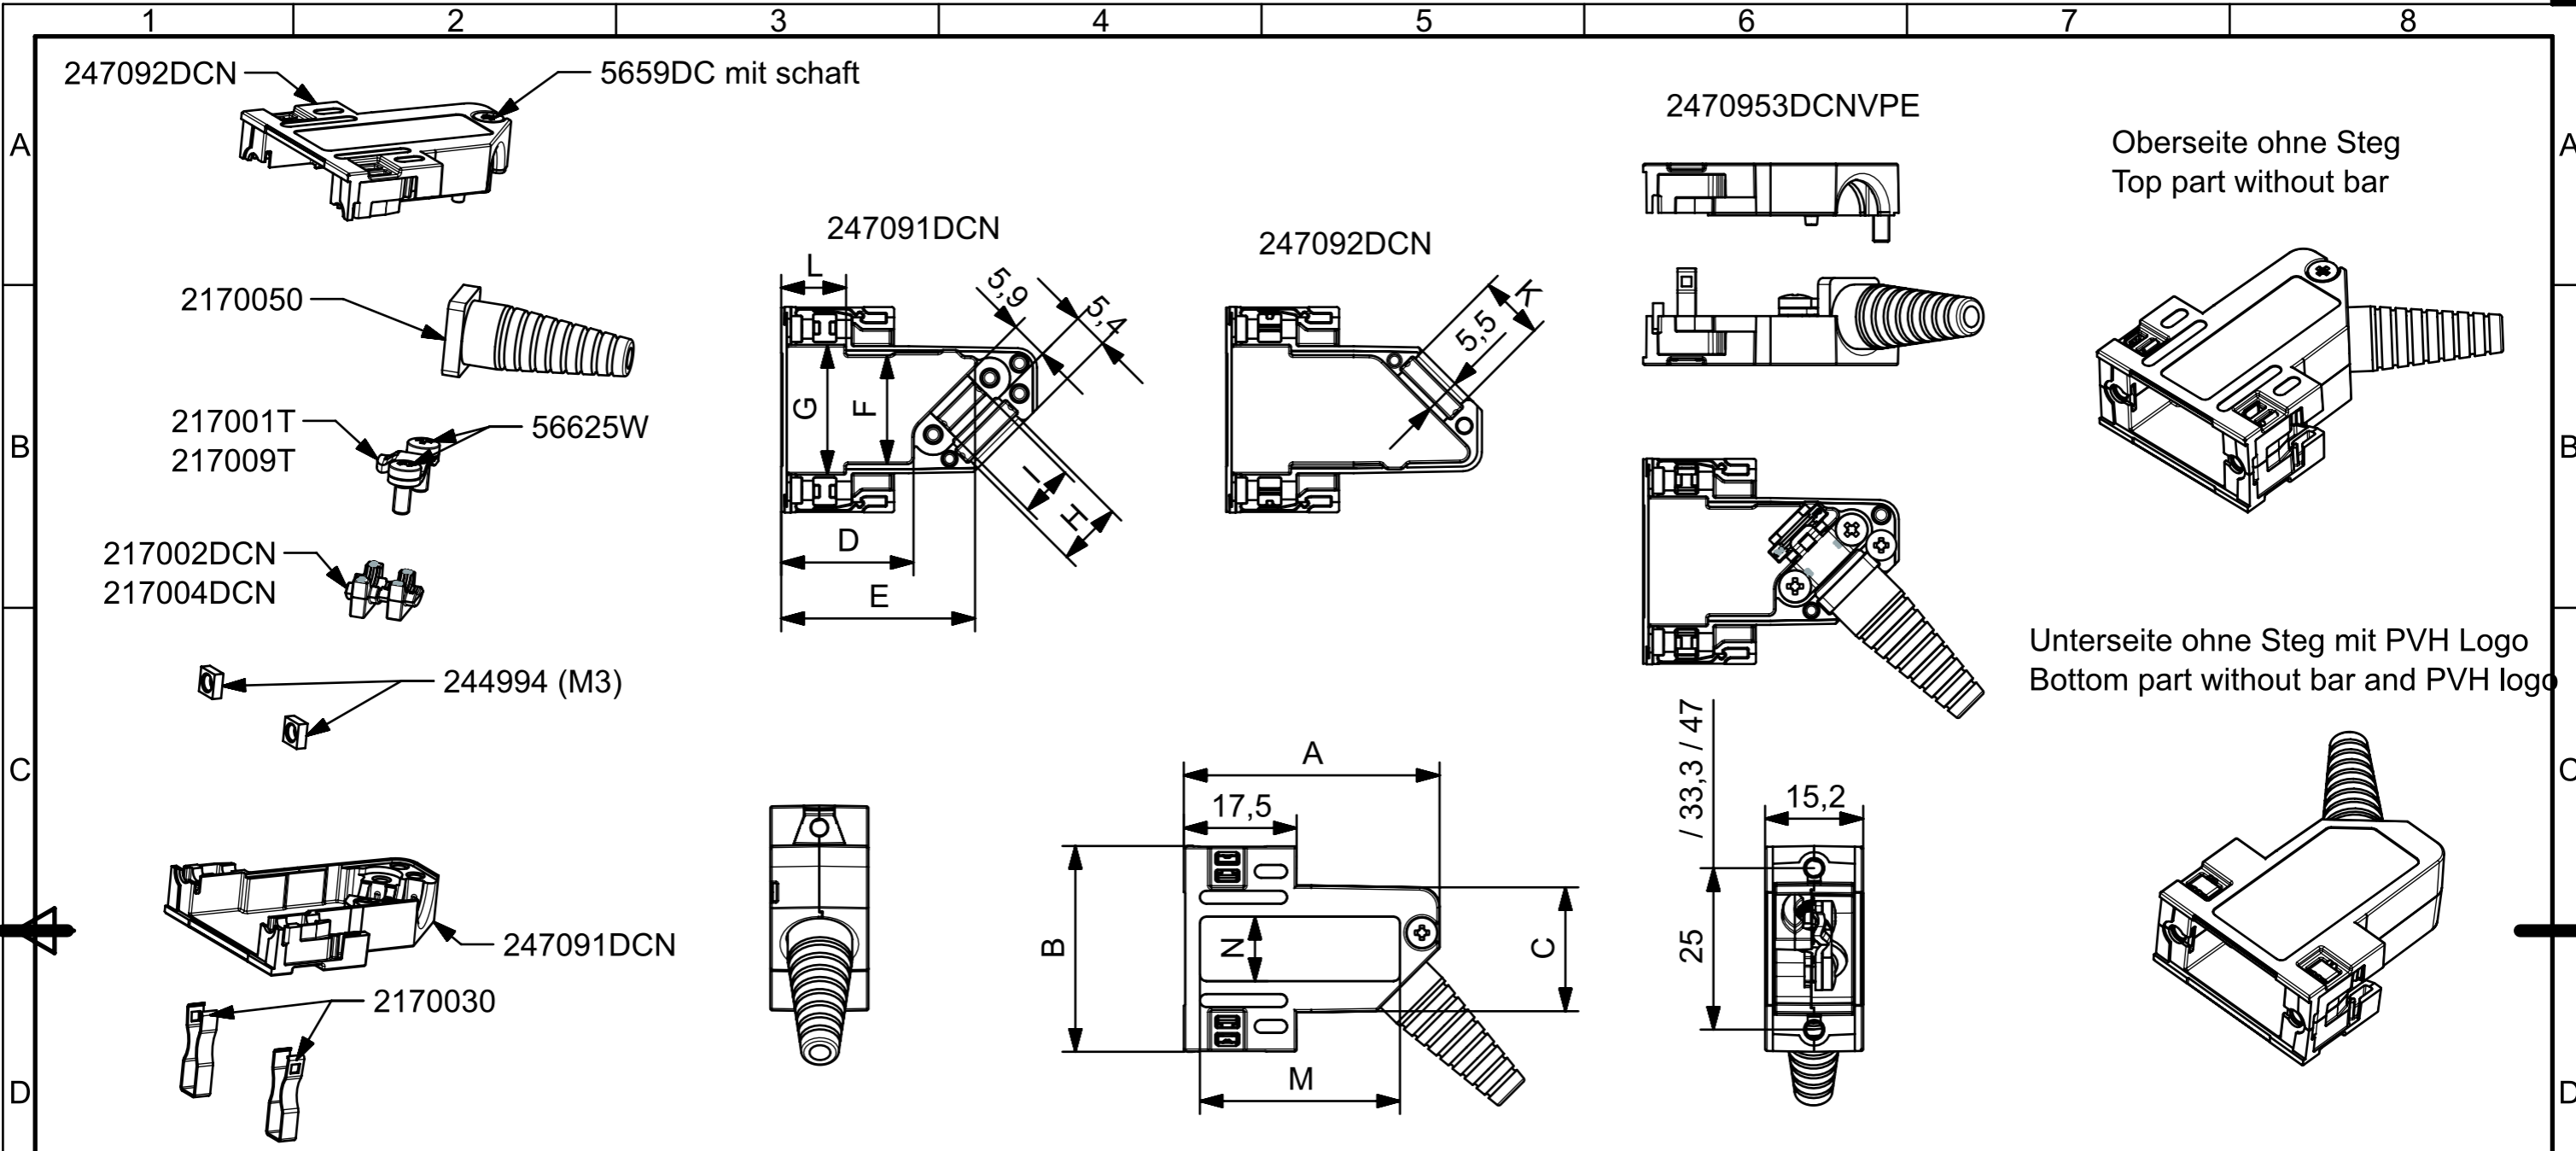

Material und Oberfläche/ material and plating
 Gehäuse: Zn-Legierung vernickelt / housing : Zn alloy nickel-plated
 Verriegelungsschraube: Stahl vernickelt / locking screws : steel nickel-plated
 Alle anderen Schrauben: Stahl verzinkt /all other screws: steel zinc-plated
 Halteclip: Edelstahl / retaining clip : stainless steel
 Zugentlastungsbügel: Stahl verzinkt / strain relief clamp : steel tin-plated
 Knickschutztülle: TPE / cable bushing: TPE
 Kabelklemme / cable clamp: ø 3- 9,5 mm
 Verpackungseinheit 50 Stück: VPE=000 - als Schüttgut, VPE=001 - als Set
 Packing unit 50 pcs: VPE=000 - bulk packing, VPE=001 - as set

9, 15, 25pol.	Maß / Dimension in mm													
	A	B	C	D	E	F	G	H	I	J	K	L	M	N
24725X	45,1	54,0	34,9	23,4	43,7	38,9	42,1	13,7	10,5		13,6	10,0	34,5	30,0
24715X	41,0	40,2	25,2	19,3	39,4	25,1	28,3	12,0	10		12,1	10,0	30,5	14,0
24709X	39,6	31,9	19,2	20,5	30,0	16,8	20,0	10,0	8,2		10,0	10,0	31,0	10,0
PVH-Artikel-Nr.	A	B	C	D	E	F	G	H	I	J	K	L	M	N
PVH-article no.	A	B	C	D	E	F	G	H	I	J	K	L	M	N

Gr1. 9pol / Gr2. 15Pol / Gr2. 25Pol

Toleranzen/tolerances		Projektion/projection		Maßstab/scale: 1:1 (5:1)	
±0,3				Werkstoff/material: Z410	
				Oberfläche mm²/surface mm²:	
				Veredelung/refinement: Vernickelt	
				Gewicht/weight:	
		Maßangaben in/dimensions units: mm		Benennung/name	
		Datum/date		Name	
		Bearbeiter/drawn: 01.02.2022		U.Schulz	
		Geprüft/checked: 01.02.2022		Wiederkehr	
				Zeichnungs-Nr./drawing number	
				Blatt/sheet	
02 Nummernanpassung 27.04.2023 U.S.		PROVERTHA®		FLEXLOCK 09-25 135 SV M3	
01 Freigabe 01.02.2022 U.S.		CONNECTORS, CABELS & SOLUTIONS		VP50 KR OS	
Index Änderung/change Datum/date Name		Kd.-Zg./custom.-drawing:		2470953DCN001-P_02	
				Ersatz fuer/substitute to:	