
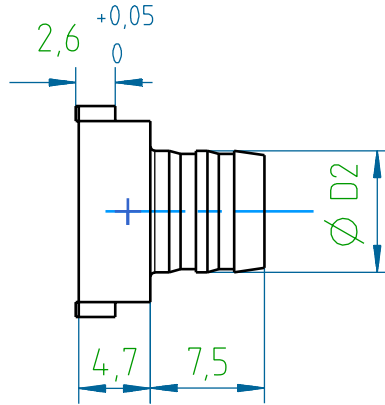
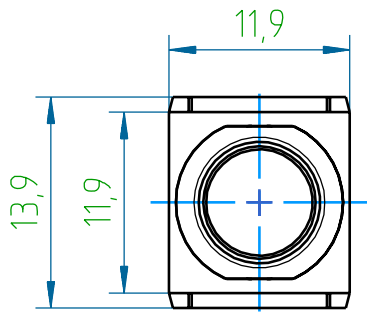



D030F040T	3,0	4,0
D035F045T	3,5	4,5
D040F050T	4,0	5,0
D045F055T	4,5	5,5
D050F060T	5,0	6,0
D055F065T	5,5	6,5
D057F067T	5,7	6,7
D060F070T	6,0	7,0
D065F075T	6,5	7,5
D070F080T	7,0	8,0
D076F085T	7,6	8,5
D080F090T	8,0	9,0
D085F095T	8,5	9,5
D090F100T	9,0	10,0
PVH-Artikel-Nr.: PVH-article-no.:	D1	D2

Toleranzen / tolerances: DIN ISO 2768-m			Projektion / projection: 		Maßstab / scale: 2:1 (D070F080T)		Werkstoff / material: ZL0410 & CuZn39Pb3 Oberfläche cm² / surface cm²: Veredelung / refinement Gewicht g / weight g Cu2/Sn4 (Flansch/Flange) 4 (D070F080T)			
			Maßangaben in: dimension units		mm		Artikel / article: Crimpflansch klein Crimp flanges small			
			Datum / date		Name / name					
			Bearb / drawn		15.11.2012				Strauch	
			Gepr / checked		15.11.2012				Schulz	
08 neu gezeichnet			15.11.2012		Ast		Zeichnungs-Nr. / drawing no. DXXXXFXXXT-P		Blatt / sheet 1/1	
Index Änderung / modification			Datum		Name		Kd-Zg:		Ersatz für / substitute to: DXXXXFXXXT	DIN A4

PROVERTHA
CONNECTORS, CABLES & SOLUTIONS